




Fluid Power Pneumatic Division

SOLENOID VALVES

100 SERIES

5 port, 4 way

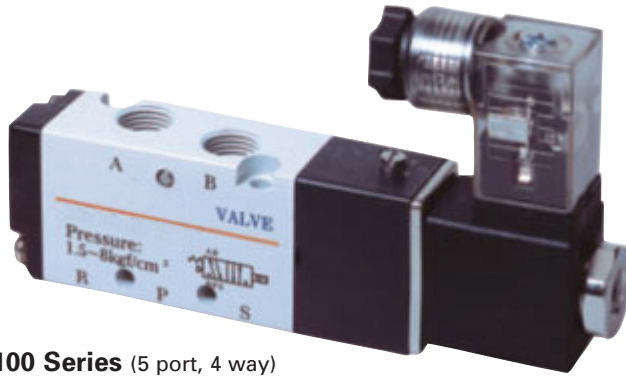


100 Series (5 port, 4 way)

SPECIFICATIONS

Media	Air (No other gases or liquids)
Operation	Solenoid (Direct Acting)
Function	5 port, 4 way
Operating Temp. Range	41 - 140°F (5 - 60°C)
Maximum Pressure	10.5 Kgf/cm ² (150psi)
Working Pressure	1.5 - 8.0 Kgf/cm ² (21-114psi)
Orifice	9 mm ² - 12 mm ²
Flows	
Lubrication	None Required
Maximum Cycle Rate	5 cycles/second
Insulation	Class F
Power Consumption	AC: 3.0VA DC: 2.5W


SYMBOL



5 port, 4 way, 2 position
(spring return,
single solenoid)




5 port, 4 way, 2 position
(detented,
double solenoid)



5 port, 4 way, 3 position
(spring centered blocked,
double solenoid)

FLOW DATA

SV102 1/8"

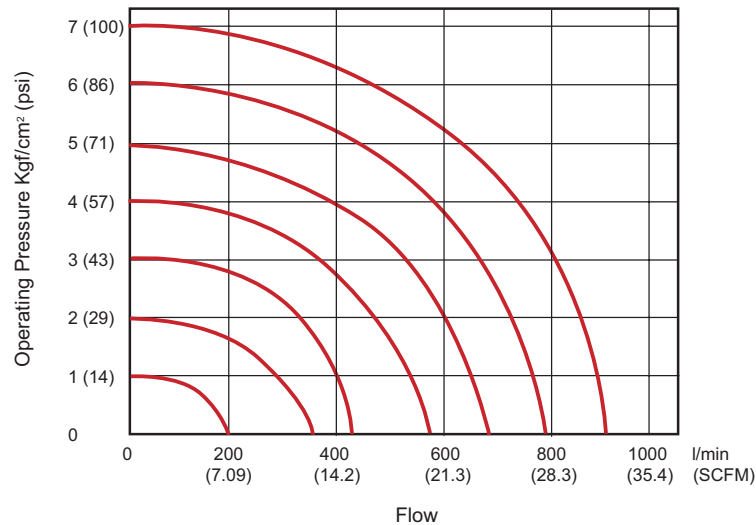



Fluid Power Pneumatic Division

SOLENOID VALVES


100 SERIES

5 port, 4 way

CONSTRUCTION MATERIAL

Name	Material			Name	Material		
	542S	542D	543B		542S	542D	543B
Body	Aluminum Alloy			Fixed Plate	Nickel Plated Steel		
Spool	Aluminum Alloy			Nut	Plastic		
Manual Override O-Ring	NBR			Manual Override	Copper		
Connector Gasket	NBR			Bottom Cover	Zinc Alloy		
Spool O-Ring	NBR			Manual Override Spring	Stainless Steel		
Bottom Cover Gasket	NBR			Spool Spring	Stainless Steel		
Pilot Gasket	NBR			Pilot Body	PBT+Glass Fiber		
Connector	Plastic			Fixed Screw	Iron		
Return Kit			Copper	Coil Cover	Heat-Resistant Resin		
Side Cover			Aluminum Alloy	Manifold	Aluminum Alloy		
Return Spring			Stainless Steel	Piston	Plastic		
Return Spring Kit			Copper	Armature	Pure Iron		

PARTS BREAKDOWN

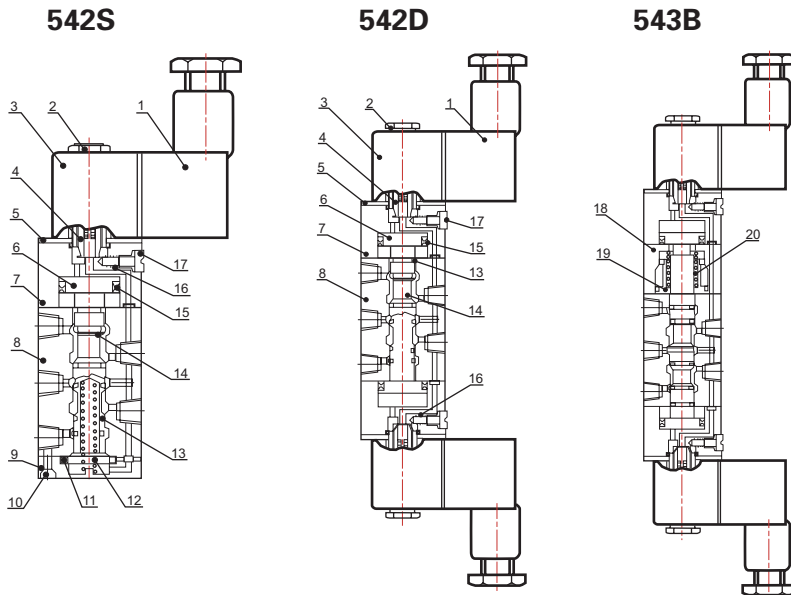

No.	Name	No.	Name
1	Connector	11	Bottom Cover Gasket
2	Nut	12	Spool Spring
3	Coil	13	Spool O-Ring
4	Armature Assembly	14	Spool
5	Fixed Plate	15	Piston O-Ring
6	Piston	16	Override Spring
7	Pilot Kit	17	Manual Override
8	Body	18	Side Cover
9	Bottom Cover	19	Spring Holder
10	Fixed Screw	20	Return Spring

ORDERING INFORMATION

SV - 102 - 542S - 24D - SRL

Code	Description	Model	Port Size	Coil Voltage	Code	Electrical Connector
SV	Solenoid Valve	102	1/8"	omit (none)	omit	none
542S	5 port, 4 way, 2 pos., spring return	12D (DC)		24A (AC)	SR	Strain Relief
542D	5 port, 4 way, 2 pos., detented (double solenoid)	24D (DC)		48A (AC)	CD	1/2" Conduit
543B	5 port, 4 way, 3 pos., spring centered-all ports blocked (double solenoid)	110A (AC)		220A (AC)	LW	Lead Wire 36"
					SRL	Strain Relief-Lighted (standard)
					CDL	1/2" Conduit-Lighted
					LWL	Lead Wire 36"-Lighted




100 SERIES

5 port, 4 way




DIMENSIONAL DATA

Units: mm/ (Inch)

SV102-542S

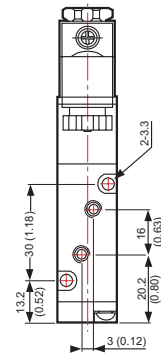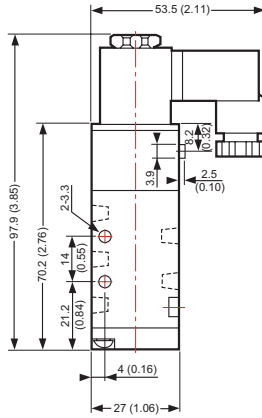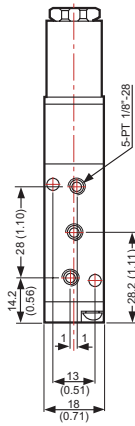

SV102-542D

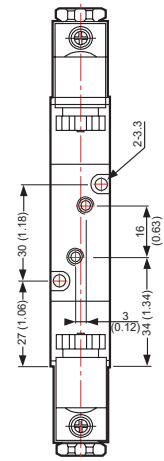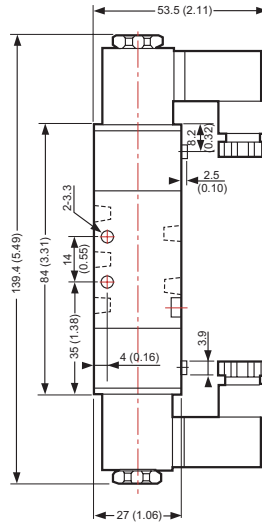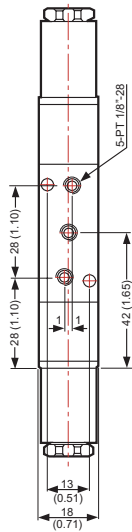

SV102-543B

